



ClearCam™ CC2000NW VIDEO CONFERENCE CAMERA

The CC2000 camera is a full featured video conferencing camera that offers superior imaging performance. The features include advanced ISP processing algorithms to provide vivid images with excellent depth, high resolution, and true color rendition. It supports H.264/H.265 encoding allowing for fluent video motion even under low bandwidth conditions.

Features

- High quality 1/2.8-inch, high quality CMOS sensor. 1920×1080 resolution with frame rates up to 60fps.
- 20x optical zoom lens, with 54.7-degree horizontal viewing angle along with leading auto focus algorithm makes for fast, accurate and stable auto-focusing.
- Wide-range, quiet and quick pan/tilt mechanism
- Low noise and high SNR
- Multiple audio/video compression options
- Network protocols include NDI®, ONVIF, RTSP, RTMP protocols and support RTMP push mode
- Supports low-power sleep/wake up mode to minimize power use.
- FECC (far-end camera control) supported.
- 255 presets, with additional controls for brightness, color, saturation, contrast, sharpness, B/W mode and gamma curve.
- USB3.0 output, plug-and-play, compatible with your preferred video conferencing software and platform including eNcounter®.




+1 (480) 922-0044
globalmed.com

15023 N 73rd Street
Scottsdale, AZ 85260
United States



ClearCam™ CC2000NW VIDEO CONFERENCE CAMERA

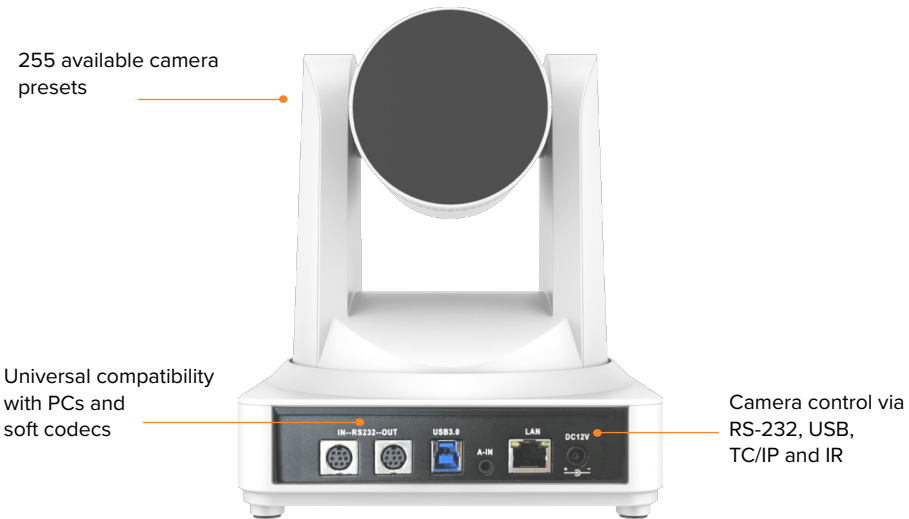

Package Contents	Camera, Power Adapter, Remote Control, USB cable, Power Cable
Sensor	1/2.8" inch high quality HD CMOS sensor, 2.07 MP
Lens	20x optical zoom, 10x digital zoom 3.3 –54.7° (Horz)
View Angle	U3 1920 X 1080p 60/0/30/25
Video System	U3 1280 x 720p 60/50/30/25 fps
Focal Length	f=5.5 (wide) ~ 110 mm(tele)
S/N Rate	>55db
Minimum Illumination	0.5 lux (F1.8, AGC On)
Focus	Auto/Manual/A Key focus
Video Adjust	Brightness, Color, Saturation, Contrast, Sharpness, B/W Mode, Gamma curve
White Balance	Auto/Manual/One Push/3000K-700K
Exposure Control	Auto/Manual
Aperture/Shutter	Auto/Manual
Pan Rotation Angle	-170°~ +170°
Tilt Rotation Angle	-30°~ +90°
Pan Rotation Speed	0.1 -60°/s
Tilt Rotation Speed	0.1 -30°/s
Preset	255
Video Output	HDMI, SDI, LAN, USB3.0, USB2.0
Audio / Video	AAC/MP3/G.711A, H.264/H.265
Control	RS232 (Visca), Pelco-D, Pelco-P
Power Consumption	12W Maximum @ 12 VDC
Camera Dimension	5.9" x 5.9" x 6.6" (150 x 150 x 167.5 mm)
Weight	3.1 lbs(1.4 kg)

MODEL NUMBER GMR 14040081