



TRANSPORTABLE EXAM STATION

The GlobalMed® Transportable Exam Station (TES) brings a new dimension to providing telemedicine to the patient in austere environments.

TES is a fully mobile telemedicine platform with a built in military-grade ruggedized tablet with readable glove capable Gorilla Glass for video conferencing in any condition. Network connectivity is achieved using a Cradlepoint connection for 3G/4G/LTE or built in WiFi.

TES is ideal for these scenarios:

- Emergency Response
- Disaster Relief
- Homebased Patient Care
- Rural Healthcare Outreach

Compatible devices include:

- TotalExam® 3 Camera
- Horus Ophthalmoscope
- ClearSteth® Stethoscope
- ClearProbe Ultrasound




**TES stores an array of cameras and medical devices in a rugged, impact-, dust-, and weather-resistant rolling case.*

+1 (480) 922-0044
globalmed.com

15023 N 73rd Street
Scottsdale, AZ 85260
United States



TRANSPORTABLE EXAM STATION

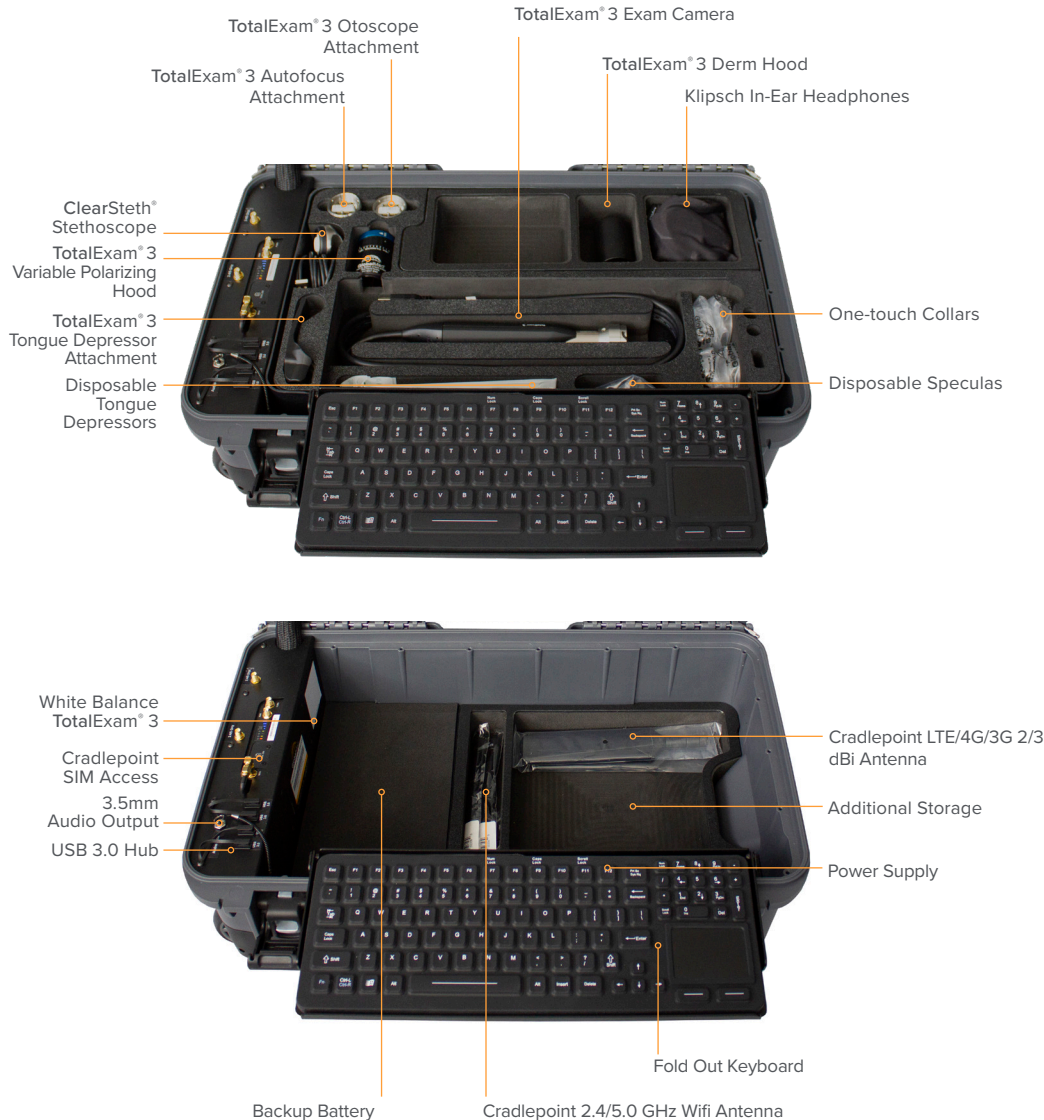

| | |
|-------------------------------------|---|
| Dimensions | Exterior: 22"L x 14"W x 9"H Interior: 20.5"L x 11.3"W x 7.5"H |
| Weight | 33 Pounds |
| Power | 16.8V DC at 2.5A MAX 185 Wh |
| Battery Life | Approx. 12 hours at max configuration. Battery life varies depending on usage. |
| Computer | Dell® 7212 Rugged |
| Operating System | Windows® 7 or 10 |
| Display | 16:9 aspect ratio Gorilla Glass touch screen |
| Keyboard | Attached keyboard with scroll zone touch-pad and tablet-integrated gesture support. |
| Connectivity | Cradlepoint COR IBR900 Router WiFi, Ethernet, 3G/4G/LTE <i>(depends on network)</i> |
| Ports | 4x USB 3.0, 1x HDMI, 1x Ethernet |
| Cables | PC cables - integrated Device cables - not integrated |
| Audio | Integrated speaker and microphone |
| Portability | 2 wheels with retractable handle |
| Main Camera | Integrated 5.0MP camera with pan/tilt functionality |
| Security | <ul style="list-style-type: none"> • Powerclaw Latching system • Reinforced metal holes for padlock use |
| Power Consumption | 12V - 20V DC at 2.5A MAX |
| Designated Battery Charger | Input 90-264VAC 47-63 Hz Output 16.8VDC 2.5A |
| Storage Transport Conditions | Water-resistant -29° to 60°C (-20° - 140°F) 5% to 95%, 38.7°C (101.6°F) Max Wet Bulb Temperature |